


ST-SERIES MKII

ACTIVE STUDIO MONITORS


Active nearfield monitors for studio or DJ applications with tuned enclosures housing highly resilient composite main drivers and neo dome tweeters. Efficient amp section delivers accurate audio reference to facilitate creative mixing and reduce listening fatigue.

ACTIVE

- Custom glass aramid composite cone woofers
- 2.5cm neo soft dome tweeter with ferrofluid
- Bi-amped (except ST10S) with 12dB/oct. filters
- Optimised directivity high frequency waveguide
- Magnetically shielded
- Balanced XLR/jack and unbalanced RCA inputs (ST10S no RCA)
- ST5 and ST6 models supplied in pairs

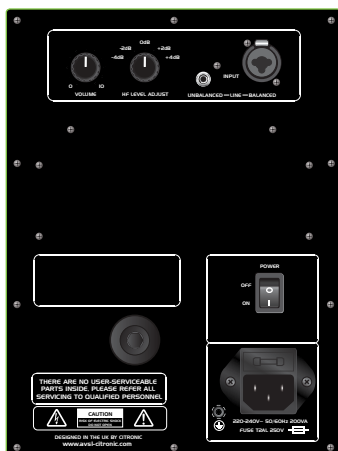

Rear panel for ST5, ST6 & ST8

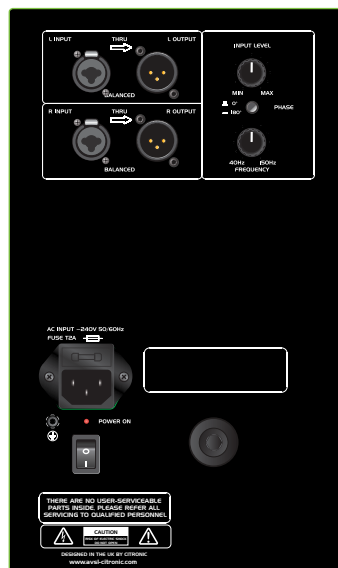

Rear panel for ST10S



	ST5	ST6	ST8	ST10S
Item ref	170.342	170.345	170.348	170.340
Power supply	240Vac 50Hz (IEC)	240Vac 50Hz (IEC)	240Vac 50Hz (IEC)	240Vac 50Hz (IEC)
Main driver	12.5cm (5")	16.5cm (6.5")	20cm (8")	25cm (10")
HF Unit	2.5cm (1")	2.5cm (1")	2.5cm (1")	N/A
Connectors	Combo (XLR & jack), RCA	Combo (XLR & jack), RCA	Combo (XLR & jack), RCA	XLR in and thru
Power RMS (LF/HF)	35/15W	50/15W	75/15W	100W (no HF)
Input impedance (balanced/unbalanced)	10kΩ	10kΩ	10kΩ	10kΩ
S/N ratio	82dB/90dB	82dB/90dB	82dB/90dB	82dB/90dB
THD	0.05/0.02%	0.05/0.02%	0.05/0.02%	0.05/0.02%
Frequency response	53Hz - 20kHz (±2dB)	50Hz - 20kHz (±2dB)	45Hz - 20kHz (±2dB)	40 - 150Hz
Dimensions	280 x 190 x 225mm	320 x 225 x 265mm	380 x 265 x 305mm	400 x 400 x 445mm
Weight (each)	5.0kg	7.0kg	9.0kg	14.5kg